

Club Car®

DRIVEN



Ingersoll Rand is a global diversified firm providing products, services and solutions to enhance the quality and comfort of air in homes and buildings, transport and protect food and perishables, secure homes and commercial properties, and increase industrial productivity and efficiency. Driven by a 100-year-old tradition of technological innovation, we enable our customers to create progress and a positive impact in their world.

1.800.CLUBCAR • +1 706.863.3000


www.clubcar.com

www.ingersollrand.com

01/12 58648767

Please note vehicles contained throughout the brochure may be shown with additional accessories.



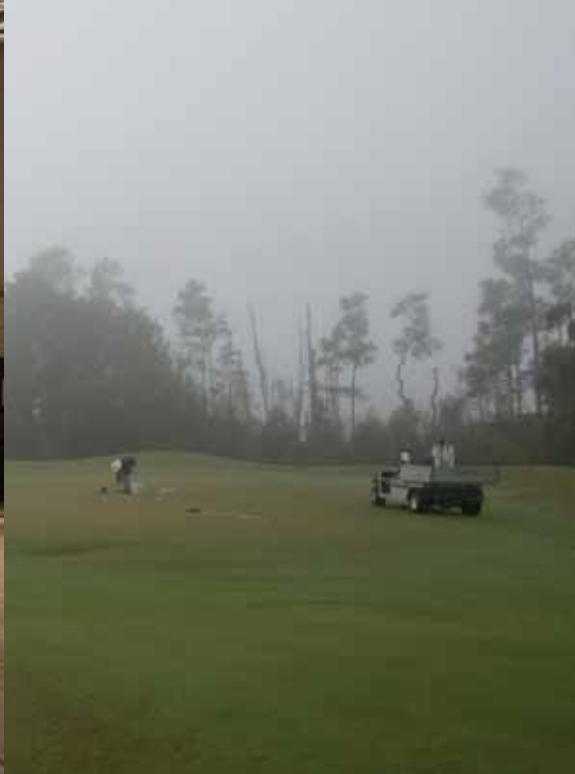



D R I V E N



Up before the sun, skipping lunch when you need to, on the property until nightfall chases you off—here's to work ethic. It's the way great operations stay great, and how Club Car® became the utility vehicles so many of you rely on. The driven get there with Club Car.





**9-to-5 Schedules,
Like Neckties, Are for
Other Professions.**

GOLF UTILITY

The reason Club Car® utility vehicles are the choice of so many superintendents? When you oversee the course and everyone who maintains it, when your work is out there for management, customers and the whole world to see and critique, dependability matters more than anything else. That's what drives Club Car to set the pace in build quality with rust-proof, all-aluminum frames that are stronger than comparable steel frames. Technologically, Club Car rides out front with its pioneering IQ Plus System™, a performance breakthrough for electronic drive trains, and IntelliTrak®, a revolutionary drive system that senses the terrain and automatically engages 4-WD as the conditions demand more power. Built to perform better and last longer—like those who insist on owning them.

- All-aluminum, rust-proof frames hold up to the onslaught of sand, grit and salt week after week, season after season, year after year
- Multiple power plants in electric, gas and diesel, in a range of sizes and load capacities, so you get the right utility vehicle for the job
- IQ System delivers faster charging, superior range for electric vehicles and best-in-class programmable speed between 8 and 17 mph
- IntelliTrak senses the terrain and kicks into 4-WD when you need extra power and load control
- Visage reduces vandalism to your fleet, and protects greens, tees, bunkers and sensitive areas from costly damage
- Visage makes signs and ropes virtually obsolete; mowing costs drop because crews never have to stop to move and replace signs and ropes



Watches over your course, vehicles and balance sheet

When your golf cars are equipped with Visage™, you automatically get exclusive fleet management capability with wide-ranging benefits. With it you can prevent vandalism, restrict cars to golf property only and away from tees, greens and bunkers, and that's just the beginning. Keeping golf cars where they belong means less damage to your course, which means maintenance crews spend less time on repairs.





TURF 1

A versatile, multi-tasking machine that can outmaneuver anything else in its class, the Carryall Turf 1 is up to any light duty job you throw at it. Choose a gas engine or electric with Club Car's® exclusive IQ System™; either way, you have an energetic partner built for the long haul.



- Club Car's exclusive IQ Plus System 48-volt electric motor or 351 cc gasoline 11.5 hp engine
- 800 lb (363.2 kg) total vehicle capacity
- 9.1 ft³ (0.3 m³) cargo box carries 300 lb (136.1 kg)
- Rustproof aircraft grade aluminum frame, chassis & cargo box
- Differential guard
- Heavy duty front bumper
- Radio/beverage holder
- Premium tread tires
- Electronic fuel gauge/hour meter, low-oil warning light
- Self-adjusting, maintenance-free rack & pinion steering for easy handling
- Heavy duty unitized powertrain



TURF 2

When you want maneuverability with a little added muscle, the Carryall Turf 2 is your go-to guy. This economical yeoman is available in gas engine or electric with the IQ Plus System™, and can handle a variety of maintenance tasks, shouldering a full 1,200 pounds of vehicle capacity. Load it up, Turf 2 can take it.



- Club Car's exclusive IQ Plus System 48-volt electric motor or 351 cc gasoline 11.5 hp engine
- 1,200 lbs (544.8 kg) total vehicle capacity
- 15.3 ft³ (0.4 m³) cargo box carries 800 lb (363.2 kg)
- Rustproof aircraft grade aluminum frame, chassis & cargo box
- Differential guard
- Heavy duty front bumper
- Headlights
- Radio/beverage holder
- Premium tread tires
- Battery warning light standard
- Self-adjusting, maintenance-free rack & pinion steering for easy handling
- Heavy duty unitized powertrain



TURF 6

It's all about return on investment these days and nothing carries that responsibility like the Carryall Turf 6. With 1,500 pounds of capacity and almost 6-feet of cargo bed, Turf 6 can do all the heavy lifting around your operation. With an 11.5 hp gas engine powering the Turf 6, you'll have all the power—and payload—you need for your operation's most demanding chores.



- 351 cc gasoline 11.5 hp engine
- 1,500 lbs (681 kg) total vehicle capacity; 17.1 ft³ cargo box with flip-down tailgate; 5.2 ft. of lockable storage
- Rustproof aircraft grade aluminum frame, chassis & cargo box
- Differential guard
- Heavy duty front bumper
- Headlights
- Radio/beverage holder
- Premium tread tires
- Battery warning light standard
- Self-adjusting, maintenance-free rack & pinion steering for easy handling
- Heavy duty unitized powertrain



TURF 252

If your to-do list is as long as your day, the rugged Carryall 252 is ready to go the distance. The high-output charger, controller, onboard computer and battery system give you fast charging and superior power and range. Prefer gas? There's an 11.5 hp, 351 cc gas engine that's primed to take on any challenge thrown its way.



- Club Car's exclusive IQ System 48-volt electric motor or 351 cc gasoline 11.5 hp engine
- Rustproof aircraft grade aluminum frame, chassis & cargo box
- Differential guard
- Heavy duty front brush guard
- Battery warning light standard
- Radio/beverage holder
- Headlights
- Independent front suspension
- Rear suspension with heavy duty stabilizer bar





CARRYALL 232

Whoever said you can't be strong and nimble at the same time never met the Carryall 232. This mighty mite in the Club Car® line packs a whole lot of muscle in a smaller package. It can handle a total capacity of 800 pounds while at the same time executing the tightest turning radius in its class. Which means there aren't many tight spots that the Carryall 232 can't get out of; and a lot of chores in hard-to-reach places on the course just got easier.

- Club Car's exclusive IQ System™ 48-volt electric motor or 351 cc gasoline 11.5 hp engine
- Headlights
- Fits in full-size pickup truck bed
- Leaf spring suspension with dual hydraulic shocks (front and rear)
- Self-adjusting rack and pinion steering, rear-wheel mechanical drum brakes, foot-operated park brake
- Spacious, rubber floor mat covered foot well
- Roto-molded plastic, tilting bed box (7 cubic feet; 300 lb capacity)
- 20" all-terrain tires
- Tightest turning diameter in class
- Sport steering wheel
- 3 cup holders



CARRYALL 295

Club Car's all-around high performance machine, the Carryall 295 has the muscle of a powerful gasoline V-twin or commercial-grade diesel engine, for when the chore calls for performance at a higher level. Built to take on more with features like IntelliTrak® 4-Wheel-Drive system that automatically senses its environment and gives you power when you need it most. Need more seats? Choose the 295 SE with four forward-facing seats and 6-point Roll Over Protective Structure (ROPS) for safety. For maximum muscle and versatility, go with the Carryall 295 with IntelliTach™ quick-change attachment system with tools ranging from blades to brooms.

- Industry's best 2-year limited warranty
- Headlights
- Exclusive IntelliTrak drive system, an automatic, full-time, 4-wheel drive system
- Maximum speed of 25 mph (40.2 kph)
- Roll Over Protective Structure (ROPS) certified to meet 5 different international standards
- 4-wheel hydraulic disc brakes
- Double A-Arm front suspension w/coil-over shocks enhances comfort and ride, reduces tire wear
- Semi-independent rear suspension with coil-over shocks
- 12.1 in (30.7 cm) ground clearance under foot platform to handle rough terrain
- Dash features an automotive design with glovebox, cupholders, storage spaces and tilt steering wheel
- 23 hp air-cooled Kawasaki® gas engine, 20 hp liquid-cooled Kubota™ diesel engine
- Heavy duty steel tilt cargo box with flip-down tailgate
- Bucket or bench seat options
- Rustproof aircraft grade aluminum frame, chassis & cargo box
- 1,200 lbs (544.3 kg) total vehicle capacity; heavy duty 1,450 lbs (657.7 kg)
- Retractable seat belts



CARRYALL 295 2-Wheel Drive

Introducing the newest member of the Club Car turf family, the Carryall 295 2-WD, a medium duty vehicle with heavy duty capabilities. Call on this stout laborer when the job is big and you want to tread a little more lightly. The standard model rides on tires designed to minimize impact on turf and improved surfaces while the rear-wheel drive train and a top speed of 19 mph also help protect turf. But don't let its thoughtful footprint fool you. When it's time to move stuff from point A to point B, the standard 800 pound payload handles all but the biggest jobs; for those, turn to the optional 1,050 pound payload platform. All this and an attractive price point—for many operations, the new 295 2-WD is the perfect option.

- Industry's best 2-year limited warranty
- Headlights
- Maximum speed of 19 mph (30.6 kph)
- Aluminum cargo box
- Bucket or bench seat options
- Rustproof aircraft grade aluminum frame
- 800 lbs. (362.87 kg) bed capacity standard; optional 1,050 lbs. (476.27 kg) capacity available
- Standard: 23" Front/24" Rear Turf tires
- Optional: 25" Front/Rear All-Terrain tires

	CARRYALL 295 2-WHEEL DRIVE
POWER SOURCE	GASOLINE
ENGINE	Kawasaki 4-cycle, OHV, 675 cc, twin-cylinder industrial grade
ENGINE-COOLING	Air
ENGINE-LUBRICATION AND OIL FILTER TYPE	Full-pressure, spin-on
MAXIMUM TORQUE	39.8 ft-lb (54.9 Nm)
HORSEPOWER	23 hp (17.2 kw)
TOWING CAPACITY	1,300 lb
IGNITION	Transistorized magneto
REAR DIFFERENTIAL	Auto locking
TORQUE CONVERTER	CVT
ELECTRICAL SYSTEM	12-volt, 500 CCA
STEERING	Rack and pinion
TILT STEERING WHEEL	Standard
FRONT SUSPENSION	Independent double A-arms with coil-over shocks
REAR SUSPENSION	Semi-independent 4-link solid axle
BRAKES	4-wheel, hydraulic disc
PARK BRAKE	Automotive style
FRAME/CHASSIS	Tubular aluminum
FRONT BODY	GE Geloy high-impact, scratch-resistant, injection molded color
REAR BODY	Propylene
STANDARD TIRES	23" Front/24" Rear Turf tires
OPTIONAL TIRES	25" Front/Rear All-Terrain tires
INSTRUMENTATION	Electronic fuel gauge/hour meter, low oil warning light
BED SIZE	48.8 in x 49.8 in x 10.9 in (124 cm x 126.5 cm x 27.7 cm)
BED HEIGHT	32.7 in (83 cm)
BED CAPACITY	800 lb (363.2 kg); 1,050 lb (476.3 kg) available
TOTAL VEHICLE CAPACITY	1,200 lb (544.3 kg); 1,450 lb (657.7 kg) available
SEATING	Choice of bucket or bench; Adjustable driver's seat only available with bucket seat option
SEATING CAPACITY	2
OVERALL LENGTH	124.6 in (316.5 cm)
OVERALL WIDTH	60 in (152.4 cm)
OVERALL HEIGHT	52.6 in (133.5 cm)
WHEELBASE	88.7 in (225.3 cm)
GROUND CLEARANCE	7.28 in (18.5 cm)
FUEL TANK CAPACITY	6.5 gal (24.6 L)
TREAD	48.8 in (124 cm)
DRY WEIGHT (LESS BATTERIES AND NOT EQUIPPED WITH CANOPY SUPPORTS OR ROPS)	1,150 lb (521.6 kg)
MAXIMUM SPEED	19 mph (30.6 kph)
TURNING RADIUS	13 ft (3.8 m)
VEHICLE WARRANTY	2-year, limited

There are no warranties, express or implied, contained herein. See Limited Warranty found in the owner's manual or write to Club Car, LLC. Vehicle specifications are accurate for each model at the time of publication. The company reserves the right to make design changes without obligation to make these changes on units previously sold. These vehicles are designed and manufactured for off-road use only. They do not conform to Federal Motor Vehicle Safety Standards for automobiles or to FMVSS 500 for low-speed vehicles, and are not equipped for operation on public streets, roads or highways.

CARRYALL 232

CARRYALL 295

Get More Done With Genuine Club Car® Accessories



Dial up the comfort, functionality and performance of your utility vehicles with genuine Club Car® Accessories. We offer a complete line of factory-installed and aftermarket accessories that let you customize your utility vehicles for the chores at hand. Want to keep working regardless of the weather, operate on tougher terrain, pull more, haul more or demand longer hours of service from your vehicles? Club Car has the accessories to get it done.



Canopy Top



Heavy Duty Front Bumper



Flatbed Tool Box



Cargo Box Tool Box



Driving Range Protective Enclosure



Universal Ball Picker Mount



ROPS Cab (Roll Over Protective Structure)



Cab Safety Strobe Light




Cab Outside Mirrors



Halogen Work Lights



Accessory Switch-Panel



Cab Fan Defogger



Hour Meter



Fuel Gauge/ Hour Meter



Heavy Duty Batteries



Battery Capacity Indicator



On-Board Charger



Cab Heater



Van Box



1,700 lb. Winch



2,500 lb. Winch



Nerf Bars




Stake-Side Kit



Swisher® Dump Cart



Electric Bed Lift




Trailer Hitch



2-Inch Front Receiver Hitch



2-Inch Rear Receiver Hitch



Wheel Cover




Premium Tread 4-Ply or 6-Ply Tires




Extra-Traction, 6-Ply Tires



Turf Tires



All-Terrain Tires



Mud Tires

* For a complete listing of accessories, please contact your local Club Car dealer.

4x2 SPECIFICATIONS

	TURF 1		TURF 2	
	ELECTRIC	GASOLINE	ELECTRIC	GASOLINE
POWER SOURCE				
ENGINE	N/A	Kawasaki 4-cycle, OHV, 351 cc, single-cylinder, air-cooled, pressure-lubricated, spin-on oil filter	N/A	Kawasaki 4-cycle, OHV, 351 cc, single-cylinder, air-cooled, pressure-lubricated, spin-on oil filter
DRIVE MOTOR	48-volt shunt sepex	N/A	48-volt shunt/sepex	N/A
HORSEPOWER	3.2 hp @ 2,400 rpm (continuous), 10 hp @ 1,125 rpm (intermittent)	11.5 hp @ 3,600 rpm, exceeds SAE J1940 Performance Standards	3.1 hp @ 3,400 rpm (continuous), 21 hp @ 2,000 rpm (intermittent)	11.5 hp @ 3,600 rpm, exceeds SAE J1940 Performance Standards
GOVERNOR	N/A	Automatic ground speed sensing, internally geared-in unitized transaxle	N/A	Automatic ground speed sensing
GOVERNED RPM	N/A	3,050 +/- 30	N/A	3,170 +/- 30
IGNITION	N/A	Electronic with electronic limiter	N/A	Electronic with electronic limiter
DRIVE UNIT	12.3:1 direct-drive axle, double-reduction helical gear	Unitized transaxle, helical gears: 11.8:1 forward, 17.1:1 reverse	12.3:1 direct-drive axle, double-reduction helical gear	Unitized transaxle, helical gears: 11.8:1 forward, 17.1:1 reverse
ELECTRICAL SYSTEM	48-volt	12-volt, 500 cca 105 min reserve	48-volt	12-volt, 500 CCA, 105 min. reserve
BATTERIES	Six 8-volt	N/A	Eight 6-volt standard	N/A
CHARGER	Automatic 48-volt DC, 17 amp, UL and CUL listed	N/A	Automatic 48-volt DC, 17 amp, UL and CUL listed	N/A
CONTROLLER	250A solid state	N/A	500A solid state	N/A
KEY- OR PEDAL-START	Pedal	Pedal	Pedal	Pedal
STEERING	Self-adjusting rack and pinion	Self-adjusting rack and pinion	Self-adjusting rack and pinion	Self-adjusting rack and pinion
FRONT SUSPENSION	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks
BRAKES	Self-adjusting rear mechanical drum	Self-adjusting rear mechanical drum	4-wheel mechanical drum	4-wheel mechanical drum
PARK BRAKE	Foot-operated, multi-lock	Foot-operated, multi-lock	Foot-operated, multi-lock	Foot-operated, multi-lock
FRAME/CHASSIS	Aluminum I-beam	Aluminum I-beam	Aluminum I-beam	Aluminum I-beam
FRONT BODY	ArmorFlex®	ArmorFlex®	ArmorFlex®	ArmorFlex®
REAR BODY	All aluminum	All aluminum	All aluminum	All aluminum
TIRES	18 x 8.50-8, 4-ply rated, premium tread	18 x 8.50-8, 4-ply rated, premium tread	18 x 8.50-8, 6-ply rated, premium tread	18 x 8.50-8, 6-ply rated, premium tread
INSTRUMENTATION	Battery warning light	Electronic fuel gauge/hour meter, low-oil warning light	Battery warning light	Electronic fuel gauge/hour meter, low oil warning light
CARGO BOX SIZE	37.6 in x 45.1 in x 9.3 in (9.1 ft³) 95.6 cm x 114.6 cm x 23.5 cm	37.6 in x 45.1 in x 9.3 in (9.1 ft³) 95.6 cm x 114.6 cm x 23.5 cm	48.8 in x 49.8 in x 10.9 in (15.3 ft³) 123.8 cm x 126.4 cm x 27.6 cm	48.8 in x 49.8 in x 10.9 in (15.3 ft³) 123.8 cm x 126.4 cm x 27.6 cm
FLAT BED SIZE	35.8 in x 44.3 in (90.8 cm x 112.4 cm)	35.8 in x 44.3 in (90.8 cm x 112.4 cm)	46.9 in x 48.3 in (119.1 cm x 122.7 cm)	46.9 in x 48.3 in (119.1 cm x 122.7 cm)
BED HEIGHT	27.5 in (69.9 cm)	27.5 in (69.9 cm)	27.5 in (69.9 cm)	27.5 in (69.9 cm)
BED CAPACITY	300 lb (136.1 kg)	300 lb (136.1 kg)	800 lb (362.9 kg)	800 lb (362.9 kg)
TOTAL VEHICLE CAPACITY	800 lb (363.2 kg)	800 lb (363.2 kg)	1,200 lb (544.8 kg)	1,200 lb (544.8 kg)
OVERALL LENGTH	103.5 in (262.9 cm)	103.5 in (262.9 cm)	111 in (281.9 cm)	111 in (281.9 cm)
OVERALL WIDTH	48 in (121.9 cm)	48 in (121.9 cm)	50 in (127 cm)	50 in (127 cm)
OVERALL HEIGHT	48 in (121.9 cm)	48 in (121.9 cm)	48 in (121.9 cm)	48 in (121.9 cm)
WHEELBASE	65.5 in (166.4 cm)	65.5 in (166.4 cm)	77.5 in (196.9 cm)	77.5 in (196.9 cm)
GROUND CLEARANCE	4.5 in (11.4 cm)	4.5 in (11.4 cm)	4.5 in (11.4 cm)	4.5 in (11.4 cm)
FUEL TANK CAPACITY	N/A	5.1 gal (19.2 L)	N/A	5.1 gal (19.2 L)
STABILIZER BAR	No	Yes	No	Yes
TREAD	34.5 in/38.5 in (87.6 cm/97.8 cm)	34.5 in/38.5 in (87.6 cm/97.8 cm)	34.5 in/38.5 in (87.6 cm/97.8 cm)	34.5 in/38.5 in (87.6 cm/97.8 cm)
DRY WEIGHT (LESS BATTERIES)	530 lb (240.6 kg)	658 lb (298.7 kg)	612 lb (277.8 kg)	724 lb (328.7 kg)
OUTSIDE RADIUS CIRCLE	17.5 ft (5.3 m) dia	17.5 ft (5.3 m) dia	20.7 ft (6.3 m) dia	20.7 ft (6.3 m) dia
TURNING RADIUS	8.4 ft (2.6 m)	8.4 ft (2.6 m)	10 ft (3 m)	10 ft (3 m)
SPEED RANGE	12-15 mph (19.3-24.1 kph)	12-15 mph (19.3-24.1 kph)	5-17 mph (8-27.3 kph)	14-16 mph (22.5-25.7 kph)
VEHICLE WARRANTY	2-year, limited; 4-year batteries	2-year, limited	2-year, limited; 4-year batteries	2-year, limited

* There are no warranties, express or implied, contained herein. See Limited Warranty found in the owner's manual or write to Club Car, LLC. Vehicle specifications are accurate for each model at the time of publication. The company reserves the right to make design changes without obligation to make these changes on units previously sold. These vehicles are designed and manufactured for off-road use only. They do not conform to Federal Motor Vehicle Safety Standards for automobiles or to FMVSS 500 for low-speed vehicles, and are not equipped for operation on public streets, roads or highways.

4x2 SPECIFICATIONS

	TURF 6	TURF 252 WITH IQ PLUS™	TURF 252	CARRYALL 232	
	GASOLINE	ELECTRIC	GASOLINE	ELECTRIC	GASOLINE
POWER SOURCE					
ENGINE	Kawasaki 4-cycle, OHV, 351 cc, single-cylinder, air-cooled, pressure-lubricated, spin-on oil filter	N/A	Kawasaki 4-cycle, OHV, 351 cc, single-cylinder, air-cooled, pressure-lubricated, spin-on oil filter	N/A	Kawasaki 4-cycle, OHV, 351 cc, single-cylinder, air-cooled, pressure-lubricated, spin-on oil filter
DRIVE MOTOR	N/A	48-volt shunt/sepex	N/A	48-volt	N/A
HORSEPOWER	11.5 hp @ 3,600 rpm, exceeds SAE J1940 Performance Standards	3.7 hp @ 3,400 rpm (continuous) 21 hp @ 2,000 rpm (peak)	11.5 hp @ 3,600 rpm, exceeds SAE J1940 Performance Standards	3.2 hp (continuous)/10 hp (intermittent)	11.5 hp @ 3,600 rpm, exceeds SAE J1940 Performance Standards
GOVERNOR	Automatic ground speed sensing, internally geared-in unitized transaxle	N/A	Automatic ground speed sensing, internally geared-in unitized transaxle	N/A	Automatic ground speed sensing, internally geared-in unitized transaxle
GOVERNED RPM	3,050 +/- 30	N/A	2,900 +/- 30	N/A	3,300 +/- 30
IGNITION	Electronic with electronic RPM limiter	N/A	Electronic with electronic limiter	N/A	Electronic w/electronic RPM limiter
DRIVE UNIT	Unitized transaxle, helical gears: 11.8:1 forward, 17.1:1 reverse	12.3:1 direct-drive axle, double-reduction helical gear	Unitized transaxle, helical gears: 11.8:1 forward, 17.1:1 reverse	12.3:1 direct-drive axle, double-reduction helical gear	Unitized transaxle, helical gears: 11.8:1 forward, 17.1:1 reverse
ELECTRICAL SYSTEM	12-volt, 500 cca 105 min reserve	48-volt	12-volt, 500 cca 105 min reserve	48-volt	N/A
BATTERIES	N/A	Eight 6-volt, standard	N/A	Six 8-volt	N/A
CHARGER	N/A	Automatic, computer-controlled 48-volt DC, 17 amp, UL and CUL listed	N/A	48-volt variable with on-board computer	N/A
CONTROLLER	N/A	500A solid state	N/A	250 amp solid state	N/A
KEY- OR PEDAL-START	Key	Pedal	Pedal	Pedal	Pedal
STEERING	Self-adjusting rack and pinion	Self-adjusting rack and pinion	Self-adjusting rack and pinion	Self-adjusting rack and pinion	Self-adjusting rack and pinion
FRONT SUSPENSION	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks
BRAKES	4-wheel mechanical drum	4-wheel, mechanical drum	4-wheel, mechanical drum	Rear-wheel, mechanical drum	Rear-wheel, mechanical drum
PARK BRAKE	Foot-operated, multi-lock	Foot-operated, multi-lock	Foot-operated, multi-lock	Foot-operated	Foot-operated
FRAME/CHASSIS	Aluminum I-beam	Aluminum I-beam	Aluminum I-beam	Aluminum I-beam	Aluminum I-beam
FRONT BODY	ArmorFlex®	ArmorFlex®	ArmorFlex®	ArmorFlex®	ArmorFlex®
REAR BODY	All aluminum	All aluminum	All aluminum	ABS plastic	ABS plastic
TIRES	18 x 6.50-8, 6-ply rated, premium tread	22 x 11-10, 6 ply rated, heavy duty all-terrain tread	22 x 11-10, 6 ply rated, heavy duty all-terrain tread	20 x 10-8, 4-ply rated	20 x 10-8, 4-ply rated
INSTRUMENTATION	Electronic fuel gauge/hour meter, low-oil warning light	Electronic fuel gauge/hour meter, low-oil warning light	Electronic fuel gauge/hour meter, low-oil warning light	Battery warning light	Electronic fuel gauge/hour meter, low-oil warning light
CARGO BOX SIZE	70.5 in x 45.1 in x 9.3 in (17.1 ft³) 179.1 cm x 114.6 cm x 23.5 cm	48.4 in x 49.8 in x 10.9 in (123.8 cm x 126.4 cm x 27.6 cm)	48.4 in x 49.8 in x 10.9 in (123.8 cm x 126.4 cm x 27.6 cm)	27.5 in x 43.5 in x 11 in (65.3 cm x 110.5 cm x 27.9 cm)	27.5 in x 43.5 in x 11 in (65.3 cm x 110.5 cm x 27.9 cm)
FLAT BED SIZE	67.6 in x 44.2 in (171.8 cm x 112.2 cm)	46.9 in x 48.3 in (119.1 cm x 122.7 cm)	46.9 in x 48.3 in (119.1 cm x 122.7 cm)	N/A	N/A
BED HEIGHT	27 in (68.6 cm)	29.8 in (75.6 cm)	29.8 in (75.6 cm)	28.75 in/73 cm	28.75 in/73 cm
BED CAPACITY	1,000 lb (499.4 kg)	500 lb (226.8 kg)	500 lb (226.8 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)
TOTAL VEHICLE CAPACITY	1,500 lb (681 kg)	900 lb (408.2 kg)	900 lb (408.2 kg)	800 lb (363.2 kg)	800 lb (363.2 kg)
OVERALL LENGTH	134 in (340.4 cm)	120.4 in (305.8 cm)	120.4 in (305.8 cm)	100.5 in (255.3 cm)	100.5 in (255.3 cm)
OVERALL WIDTH	49.3 in (125.2 cm)	51.3 in (130.2 cm)	51.3 in (130.2 cm)	49.5 in (125.7 cm)	49.5 in (125.7 cm)
OVERALL HEIGHT	48 in (121.9 cm)	51.1 in (129.8 cm)	51.1 in (129.8 cm)	48 in (121.9 cm)	48 in (121.9 cm)
WHEELBASE	98.5 in (250.2 cm)	78.5 in (199.4 cm)	78.5 in (199.4 cm)	65 in (165.1 cm)	65 in (165.1 cm)
GROUND CLEARANCE	4.5 in (11.4 cm)	6.4 in (16.3 cm)	6.4 in (16.3 cm)	5.5 in (14 cm)	5.5 in (14 cm)
FUEL TANK CAPACITY	5.1 gal (19.2 L)	N/A	5.1 gal (19.2 L)	N/A	7 gal (26.0 L)
STABILIZER BAR	Yes	No	Yes	N/A	N/A
TREAD	34.5 in/38.6 in (87.6 cm/97.8 cm)	36.5 in/41.3 in (92.7 cm/104.8 cm)	36.5 in/41.3 in (92.7 cm/104.8 cm)	34/38 in. (86.4/96.5 cm)	34/38 in. (86.4/96.5 cm)
DRY WEIGHT (LESS BATTERIES)	868 lb (394.1 kg)	900 lb (408.2 kg)	910 lb (412.8 kg)	874 lb (396.4 kg)	781 lb (354.3 kg)
OUTSIDE RADIUS CIRCLE	24.7 ft (7.5 m) dia	21.7 ft (6.6 m) dia	21.7 ft (6.6 m) dia	N/A	N/A
TURNING RADIUS	12 ft (3.7 m)	10.8 ft (3.3 m)	10.8 ft (3.3 m)	8.75 ft (2.7 m)	8.75 ft (2.7 m)
SPEED RANGE	14-16 mph (22.5-25.7 kph)	15-17 mph (24.1-27.4 kph)	15-17 mph (24.1-27.4 kph)	17-19 mph (27.4-30.6 kph)	17-19 mph (27.4-30.6 kph)
VEHICLE WARRANTY	2-year, limited	2-year, limited; 4-year batteries	2-year, limited	2-year, limited	2-year, limited

* There are no warranties, express or implied, contained herein. See Limited Warranty found in the owner's manual or write to Club Car, LLC. Vehicle specifications are accurate for each model at the time of publication. The company reserves the right to make design changes without obligation to make these changes on units previously sold. These vehicles are designed and manufactured for off-road use only. They do not conform to Federal Motor Vehicle Safety Standards for automobiles or to FMVSS 500 for low-speed vehicles, and are not equipped for operation on public streets, roads or highways.

Set Your 4x4 Vehicles On Maximum Performance



Lighting Package
(Includes horn, turn signals and brake lights)

Plastic Canopy Top

Custom Van Box

Rear Cargo Cage



Electric Bed Lift

Underhood Storage
(Gas Only)

Stake-Side Kit

2-Inch Front Receiver Hitch



Cargo Bed Toolbox

2,500 lb. Warn Winch

Pintle Hitch

Nerf Bars



54- or 62-Inch Plow Blade

Swisher Trailmower

Swisher Dump Cart

40-Gallon Sprayer



Cab Heater
(Gas Only)

Club Car® 4x4 utility vehicles are as sophisticated and brawny as they come, and you can get even more performance when you outfit with genuine Club Car accessories. Built tough for the most demanding jobs, Club Car accessories maximize the versatility of your 4x4s. From towing packages and winches to innovative storage and hauling solutions, Club Car accessories let you rig your 4x4 utility vehicles to handle the toughest jobs on the course.

* For a complete listing of accessories, please contact your local Club Car dealer.

	CARRYALL 295		CARRYALL 295 SE		CARRYALL 295 INTELLITACH™
	GASOLINE	DIESEL	GASOLINE	DIESEL	DIESEL
POWER SOURCE	GASOLINE	DIESEL	GASOLINE	DIESEL	DIESEL
ENGINE	Kawasaki 4-cycle, OHV, 675 cc, twin-cylinder industrial grade	Kubota D722, 719 cc, 3-cylinder	Kawasaki 4-cycle, OHV, 651 cc, twin-cylinder industrial grade	Kubota D722, 719 cc, 3-cylinder	Kubota D722, 719 cc, 3-cylinder industrial grade
ENGINE-COOLING	Air	Liquid	Air	Liquid	Liquid
ENGINE-LUBRICATION AND OIL FILTER TYPE	Full-pressure, spin-on	Full-pressure, spin-on	Full-pressure, spin-on	Full-pressure, spin-on	Full-pressure, spin-on
MAXIMUM TORQUE	39.8 ft-lb (54.9 Nm)	33 ft-lb (44.7 Nm)	39.8 ft-lb (54.9 Nm)	33 ft-lb (44.7 Nm)	33 ft-lb (44.7 Nm)
HORSEPOWER	23 hp (17.2 kw)	20 hp (14.9 kw)	23 hp (17.2 kw)	20 hp (14.9 kw)	20 hp (14.9 kw)
TOWING CAPACITY	1,300 lb	1,300 lb	1,300 lb	1,300 lb	1,300 lb
IGNITION	Transistorized magneto	Compression	Transistorized magneto	Compression	Compression
4WD ENGAGEMENT	Automatic - IntelliTrak	Automatic - IntelliTrak	Automatic - IntelliTrak	Automatic - IntelliTrak	Automatic - IntelliTrak
FRONT DIFFERENTIAL	Automatic - IntelliTrak	Automatic - IntelliTrak	Automatic - IntelliTrak	Automatic - IntelliTrak	Automatic - IntelliTrak
REAR DIFFERENTIAL	Auto locking - IntelliTrak	Auto locking - IntelliTrak	Auto locking - IntelliTrak	Auto locking - IntelliTrak	Auto locking - IntelliTrak
TORQUE CONVERTER	CVT	CVT	CVT	CVT	CVT
ELECTRICAL SYSTEM	12-volt, 500 CCA	12-volt, 500 CCA	12-volt, 500 CCA	12-volt, 500 CCA	12-volt, 500 CCA
STEERING	Rack and pinion	Rack and pinion	Rack and pinion	Rack and pinion	Rack and pinion
TILT STEERING WHEEL	Standard	Standard	Standard	Standard	Standard
FRONT SUSPENSION	Independent double A-arms with coil-over shocks	Independent double A-arms with coil-over shocks	Independent double A-arms with coil-over shocks	Independent double A-arms with coil-over shocks	Independent double A-arms with coil-over shocks
REAR SUSPENSION	4 link semi-independent solid axle with coil over shocks	4 link semi-independent solid axle with coil over shocks	4 link semi-independent solid axle with coil over shocks	4 link semi-independent solid axle with coil over shocks	4 link semi-independent solid axle with coil over shocks
BRAKES	4-wheel, hydraulic disc	4-wheel, hydraulic disc	4-wheel, hydraulic disc	4-wheel, hydraulic disc	4-wheel, hydraulic disc
PARK BRAKE	Automotive style	Automotive style	Automotive style	Automotive style	Automotive style
FRAME/CHASSIS	Tubular aluminum	Tubular aluminum	Tubular aluminum	Tubular aluminum	Tubular aluminum
FRONT BODY	GE Gelyol high-impact, scratch-resistant, injection molded color	GE Gelyol high-impact, scratch-resistant, injection molded color	GE Gelyol high-impact, scratch-resistant, injection molded color	GE Gelyol high-impact, scratch-resistant, injection molded color	GE Gelyol high-impact, scratch-resistant, injection molded color
REAR BODY	Propylene impact resistant plastic	Propylene impact resistant plastic	Propylene impact resistant plastic	Propylene impact resistant plastic	Propylene impact resistant plastic
FRONT TIRES	All-terrain, 25 x 10.5-12, 4-ply	All-terrain, 25 x 10.5-12, 4-ply	All-terrain, 25 x 10.5-12, 4-ply	All-terrain, 25 x 10.5-12, 4-ply	All-terrain, 25 x 10.5-12, 4-ply
REAR TIRES	All-terrain, 25 x 10.5-12, 4-ply	All-terrain, 25 x 10.5-12, 4-ply	All-terrain, 25 x 10.5-12, 4-ply	All-terrain, 25 x 10.5-12, 4-ply	All-terrain, 25 x 10.5-12, 4-ply
INSTRUMENTATION	Electronic fuel gauge/hour meter, low oil warning light	Electronic fuel gauge/hour meter, low oil warning light, coolant high temp warning light	Electronic fuel gauge/hour meter, low oil warning light	Electronic fuel gauge/hour meter, low oil warning light, coolant high temp warning light	Electronic fuel gauge/hour meter, seatbelt warning light, low-oil warning light, coolant high-temp warning light
FLAT BED SIZE	48.8 in x 49.8 in x 10.9 in (124 cm x 126.5 cm x 27.7 cm)	48.8 in x 49.8 in x 10.9 in (124 cm x 126.5 cm x 27.7 cm)	48.8 in x 49.8 in x 10.9 in (124 cm x 126.5 cm x 27.7 cm)	48.8 in x 49.8 in x 10.9 in (124 cm x 126.5 cm x 27.7 cm)	48.8 in x 49.8 in x 10.9 in (123.8 cm x 126.4 cm x 27.6 cm)
BED HEIGHT	33 in (83.8 cm)	33 in (83.8 cm)	33 in (83.8 cm)	33 in (83.8 cm)	33 in (83.8 cm)
BED CAPACITY	800 lb (363.2 kg); 1,050 lb (476.3 kg) available	800 lb (363.2 kg); 1,050 lb (476.3 kg) available	1,050 lb (476.3 kg)	1,050 lb (476.3 kg)	800 lb (363.2 kg)
TOTAL VEHICLE CAPACITY	1,200 lb (544.3 kg); 1,450 lb (657.7 kg) available	1,200 lb (544.3 kg); 1,450 lb (657.7 kg) available	1,600 lb (725.8 kg)	1,600 lb (725.8 kg)	1,200 lb (544.3 kg)
SEATING	Choice of bucket or bench; Adjustable driver's seat only available with bucket seat option	Choice of bucket or bench; Adjustable driver's seat only available with bucket seat option	Choice of bucket or bench; Adjustable driver's seat only available with bucket seat option	Choice of bucket or bench; Adjustable driver's seat only available with bucket seat option	Bucket seats with adjustable driver's seat
SEATING CAPACITY	2	2	4	4	2
OVERALL LENGTH	124.6 in (316.5 cm)	124.6 in (316.5 cm)	157.6 in (400.3 cm)	157.6 in (400.3 cm)	148.6 in (377.4 cm)
OVERALL WIDTH	60 in (152.4 cm)	60 in (152.4 cm)	60 in (152.4 cm)	60 in (152.4 cm)	60 in (152.4 cm)
OVERALL HEIGHT	78.6 in (199.6 cm)	78.6 in (199.6 cm)	78.6 in (199.6 cm)	78.6 in (199.6 cm)	78.6 in (199.6 cm)
WHEELBASE	81.5 in (207 cm)	81.5 in (207 cm)	114 in (289.5 cm)	114 in (289.5 cm)	81.5 in (207 cm)
GROUND CLEARANCE	7.4 in (18.8 cm)	7.4 in (18.8 cm)	7.4 in (18.8 cm)	7.4 in (18.8 cm)	7.4 in (18.8 cm)
FUEL TANK CAPACITY	6.5 gal (24.6 L)	6.5 gal (24.6 L)	6.5 gal (24.6 L)	6.5 gal (24.6 L)	6.5 gal (24.6 L)
TREAD	48.8 in (124 cm)	48.8 in (124 cm)	48.8 in (124 cm)	48.8 in (124 cm)	48.8 in (124 cm)
DRY WEIGHT (LESS BATTERIES)	1,430 lb (648.6 kg)	1,559 lb (707.2 kg)	1,605 lb (728 kg)	1,786 lb (810.1 kg)	1,709 lb (775.1 kg)
MAXIMUM SPEED	25 mph (40.2 kph)	25 mph (40.2 kph)	25 mph (40.2 kph)	25 mph (40.2 kph)	25 mph (40.2 kph)
TURNING RADIUS	13 ft (3.8 m)	13 ft (3.8 m)	17 ft (5.4 m)	17 ft (5.4 m)	13.8 ft (4.2 m)
VEHICLE WARRANTY	2-year, limited	2-year, limited	2-year, limited	2-year, limited	2-year, limited

* There are no warranties, express or implied, contained herein. See Limited Warranty found in the owner's manual or write to Club Car, LLC. Vehicle specifications are accurate for each model at the time of publication. The company reserves the right to make design changes without obligation to make these changes on units previously sold. These vehicles are designed and manufactured for off-road use only. They do not conform to Federal Motor Vehicle Safety Standards for automobiles or to FMVSS 500 for low-speed vehicles, and are not equipped for operation on public streets, roads or highways.

